

PVC Low Noise systems vs ductile iron environmental impact comparison

An independent study following EN 15804 methodology by the world-renowned Flemish institute for Technological Research (VITO), and validated by the Denkstatt sustainable development institute in Austria, is conclusive in its findings that Low Noise plastic soil and waste pipe systems made from PVC have lower environmental impact than those made from ductile iron.

Relative size of environmental footprint


To make a fair comparison between these two different materials and determine the environmental impacts of both, each stage of their lifecycle was analysed. “Environmental footprints” can be either adverse or beneficial. Adverse effects such as emitting greenhouse gases may arise in either the product’s production or disposal process; beneficial effects help to reduce greenhouse gas emissions by saving energy whilst the product is in use.



Determining a product’s environmental footprint

A scientifically-based full Life Cycle Assessment (LCA) is the standardised method for fairly comparing the environmental impacts of different products or services. This type of assessment involves systematically collecting and evaluating quantitative data on the inputs and outputs of material, energy and waste flows associated with a product over its entire life cycle. Therefore a whole range of processes

need to be assessed to calculate overall impacts, beginning with the manufacturing of raw materials, to transforming them into products; continuing through the product’s transportation and installation, the product’s lifetime of use, and ultimately, the product’s disposal or re-processing at the end of life.

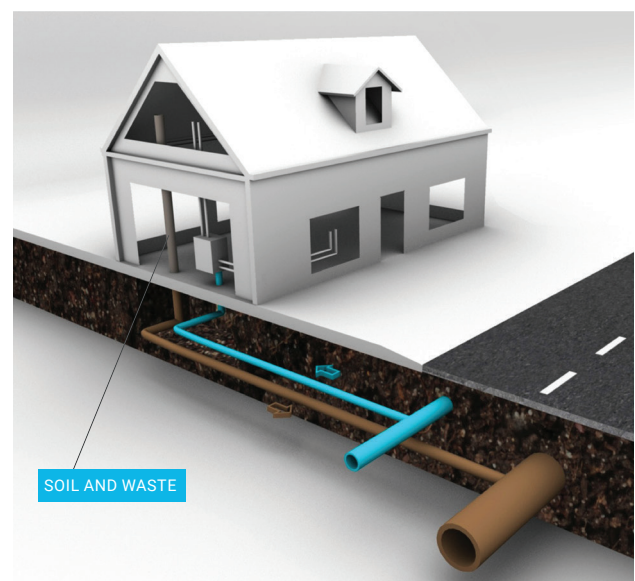

The findings of LCA assessments are typically published in the form of Environmental Product Declarations (EPDs) to help communicate a product's overall environmental impact.

The VITO study involved collecting data on plastic pipe systems from companies covering more than 50% of the European market. Data for ductile iron was based on publicly available information.

Environmental impact criteria

The environmental impact of each pipe material was assessed against seven different criteria across its full life cycle.



Abiotic Resources Depletion (non-fossil)

ADPn: the over-extraction of minerals, fossil fuels and other non-living, non-renewable materials which can lead to exhaustion of natural resources.



Abiotic Resources Depletion (fossil) ADPf:

the over-extraction of fossil fuels including all fossil resources.



Acidification Potential AD: emissions, such as sulphur dioxide and nitrogen oxides from manufacturing processes, result in acid rain which harms soil, water supplies, human and animal organisms, and the ecosystem.



Eutrophication Potential EP: increased concentrations of nitrates and phosphates can encourage excessive growth of algae and reduce oxygen levels. This increases mortality in aquatic fauna and flora, leads to loss of species dependent on low-nutrient environments, reduces biodiversity and has knock-on effects on non-aquatic animals and humans.



Global Warming Potential GWP: the insulating effect of greenhouse gases (GHG) - CO₂ and methane - in the atmosphere preventing the earth losing heat gained from the sun. As global temperature rises, it is expected to cause climatic disturbance, desertification, rising sea levels and spread of disease.



Ozone Depletion Potential ODP: depletion of the ozone layer (O₃) in the atmosphere caused by the emission of chemical foaming and cleaning agents allows the passage of greater levels of UV from the sun, causing skin cancer, damage to the immune system and reducing crop yields.



Photochemical Ozone Creation Potential POCP: creation of ozone in the presence of sunlight, nitrogen oxides and volatile organic compounds. Ozone leads to chemical smogs that affect human health, food crops and the ecosystem in general. The effects vary according to geography and climate and are especially problematic in heavily urbanised areas with existing pollution.


Comparison based on identical functional units

For the purpose of a direct fair comparison between alternative materials the following identical functional units were used in the LCA study for soil and waste pipe systems:


- a pipe system for the gravity discharge and transport of soil and waste from an apartment of 100m² to the entrance of a public sewer system
- a 50 year lifetime has been assumed, which aligns with the normal lifetime expectancy of a building.

All rights, amongst which the copyright, on the materials described in this document rest with The European Plastics Pipes and Fittings Association ("TEPPFA"), Avenue de Cortenbergh, 71, B-1000 Brussels (Belgium). This document may not be reproduced or brought into circulation without the prior written consent of TEPPFA. Without prior permission in writing from TEPPFA this document may not be used, in sense. Possible mistakes during the reproduction process of these promotion materials may not be attributed to TEPPFA.

Comparison of PVC Low Noise to DI for the 7 environmental impact criteria

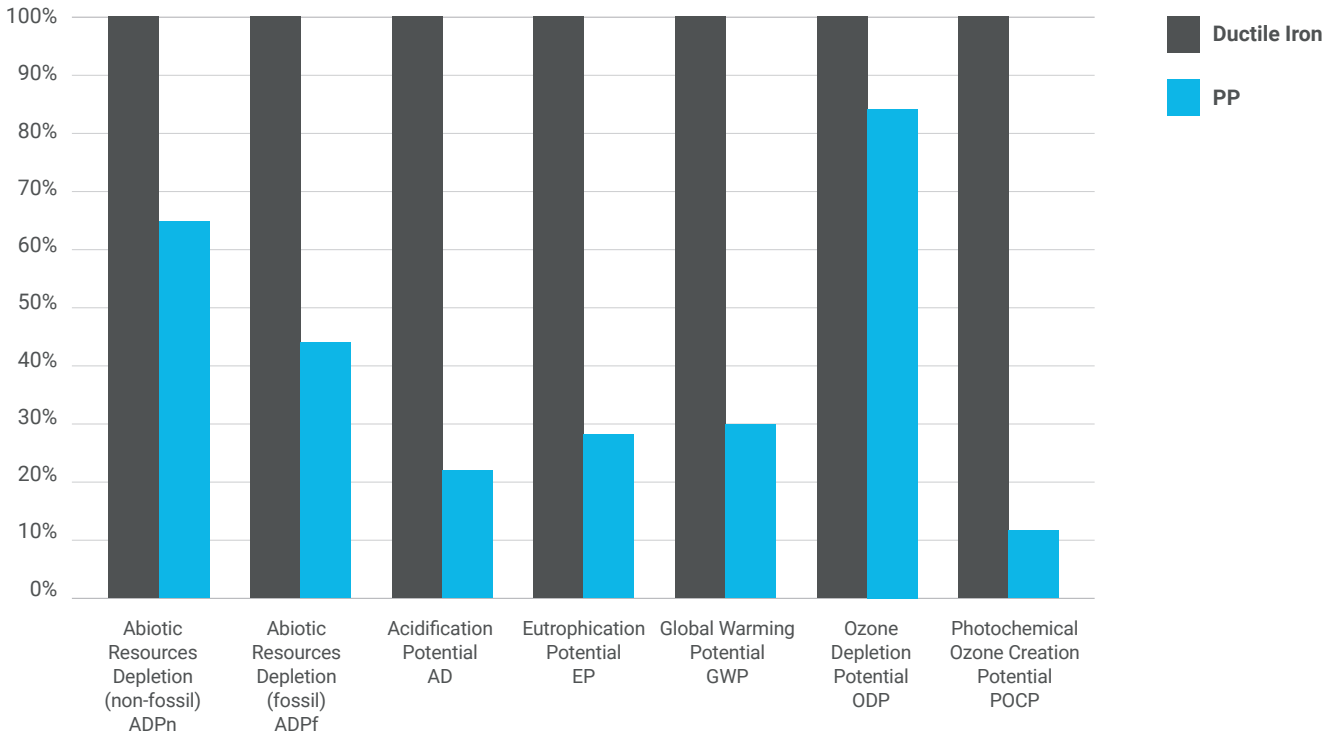

Environmental profile of the PVC Low Noise pipe system for soil and waste removal (building) from cradle-to-grave per functional unit

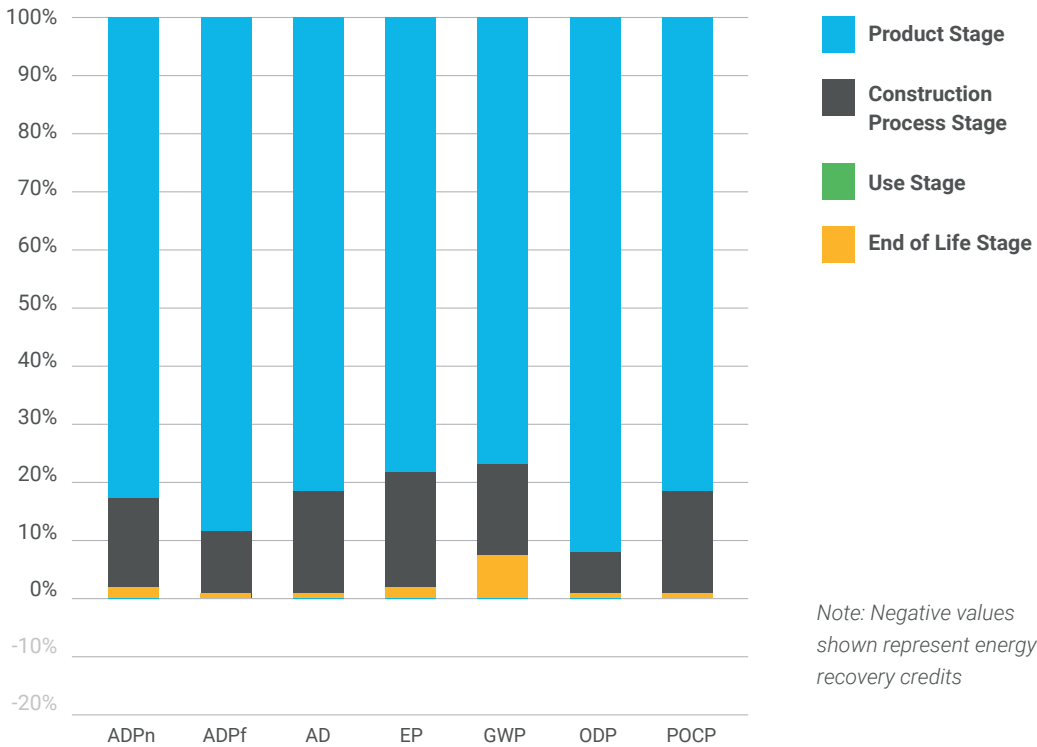

Profile of the PVC low noise pipe system for soil and waste (cradle-to-grave) in absolute figures per functional

IMPACT CATEGORY	Abiotic Resources Depletion (non-fossil) ADPn	Abiotic Resources Depletion (fossil) ADPf	Acidification Potential AD	Eutrophication Potential EP	Global Warming Potential GWP	Ozone Depletion Potential ODP	Photochemical Ozone Creation Potential POCP
Life cycle phases	kg Sb eq	MJ	kg SO2 eq	kg PO4 ⁻⁻⁻ eq	kg CO2 eq	kg CFC-11 eq	kg C2H4 eq
Product Stage	8.62E-06	3.91E+01	5.94E-03	9.96E-04	1.81E+00	5.83E-07	3.80E-04
Construction Process Stage	1.65E-06	5.17E+00	1.33E-03	2.41E-04	3.73E-01	5.40E-08	8.67E-05
Use Stage	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
End of Life Stage	1.71E-07	3.06E-01	3.70E-05	1.94E-05	2.03E-01	5.19E-09	4.09E-06
TOTAL	1.04E-05	4.46E+01	7.30E-03	1.26E-03	2.39E+00	6.42E-07	4.70E-04

More detailed information about this material comparison can be obtained via www.teppfa.eu or by contacting TEPPFA at: info@teppfa.eu.

TEPPFA Environmental Product Declarations

The TEPPFA EPDs are aimed at demonstrating the value that plastic pipe systems offer for a sustainable future. We commissioned an independent study by the Flemish Institute for Technological Research (VITO) to measure the environmental footprint of various plastic pipe systems based on life-cycle assessment. The work was validated by the Denkstatt sustainability consultancy in Austria.

An important objective was to provide transparency about the impact of plastic pipe systems on our environment. It was also an important step in the development of the Environmental Product Declarations for plastic pipes.

Data for the plastic systems is provided by the TEPPFA member companies using the Life Cycle Assessment (LCA) method. Data for the non-polymer alternative materials (ductile iron, copper, concrete) is based on the publicly available figures.

Contributors to this study consist of numerous companies, institutes and associations, which among others include PlasticsEurope, TNO and PVC4Pipes. Data was collected from 60% of companies within the European pipe industry.

Registered Office:

Avenue de Cortenberg, 71
1000 Brussels
Belgium

tel: +32 2 736 24 06

e-mail: info@teppfa.eu

The European Plastic Pipes and Fittings Association (TEPPFA) is the leading voice of plastic pipe and fittings manufacturers in Europe. Being a trade association, we are actively involved in the promotion of plastic pipe systems for all applications. Through our work, TEPPFA wants to raise awareness of the value that plastic pipe systems offer for a sustainable future.

Visit our website

www.teppfa.eu